


Frequencies		Remarks	MSA LSZB ARP		
	135.015 133.050	RNAV 1 Certification required	Outer Circle: 25 NM		
Swiss Radar	135.680 128.050		Inner Circle: 10 NM		
	134.850 128.905				
Bern Arrival	127.325 -	Initial climb clearance 5000 ft			
Bern Tower	121.025 -				
Bern Delivery	121.690 -				
Bern ATIS	125.130 -				

RAMOK 3A
RWY 32 RNAV DEPARTURE
FOR ROUTE CONTINUATION AFTER RAMOK
REFER TO CHART NO. 08
PROCEDURE CLIMB GRADIENT
10.0% to 3400 ft

BEARINGS, TRACKS AND
RADIALS ARE MAGNETIC
DISTANCES IN NM
ALTITUDES IN FT

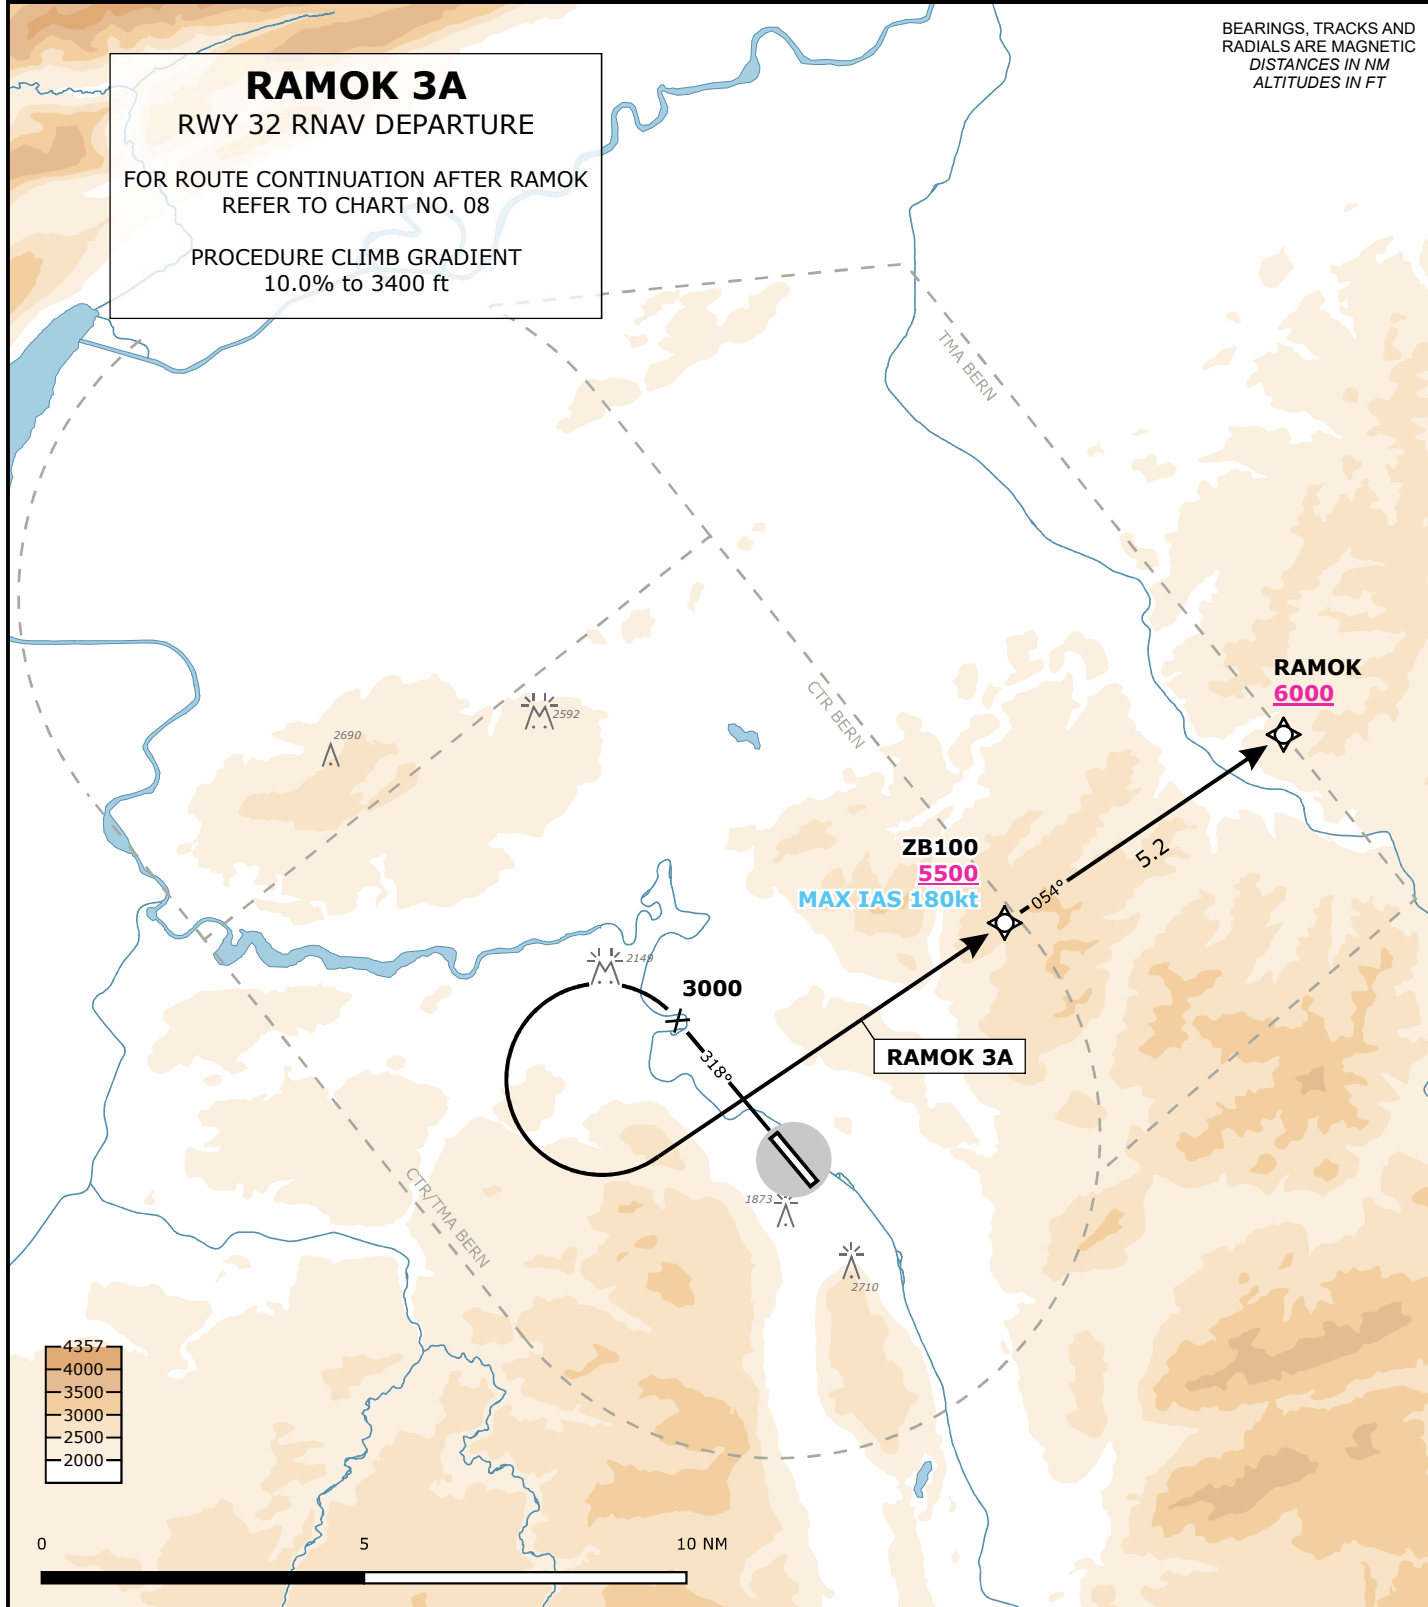

Valid for flight simulation use only - do not use for real life navigation

RWY	SID	Lateral Routing	Vertical Routing
32	RAMOK 3A	Climb straight ahead. At 3000ft turn left direct to ZB100 (MAX IAS 180kt). Proceed to RAMOK.	Cross ZB100 at 5500ft or above, RAMOK at 6000ft or above.

Changes: Frequencies